

ARES

AUTOMATIC RESISTIVITY & IP SYSTEM



**850 W - 2000 V_{p-p} - 5 A Transmitter
for all Multi-Electrode and Manual Modes
Up to 10 Adjustable IP Windows**

**2D/3D Resistivity & IP Tomography
VES, RP, SP Measurements**

**Active Multi-Electrode Cables
Passive Cables with Switch Box
Roll-Along Possibility**

**Easy Operation
Data Download via RS232 or USB Port
Supply from 12 V Battery or AC/DC Convertor**



Applications:

groundwater exploration, geotechnical investigation, monitoring of dams and dikes, environmental studies, geological survey, mineral prospecting, archaeology, detecting of cavities and buried objects, underwater, marine, borehole and cross-hole measurements.

ARES Traditional single channel resistivity & IP system equipped with a variety of smart and economic accessories.

One ruggedized weatherproof unit integrates transmitter with receiver and control unit completed with rich software support for many measuring methods.

ARES - Technical Specifications

Transmitter

Power	up to 850 W
Current	up to 5 A (24 bit resolution)
Voltage	2000 V _{p-p} (actually applied voltage automatically optimizes level of measured potential) full electronic protection, energy efficiency up to 91%, passive cooling without ventilation holes

Receiver

Input voltage range	±5 V _{p-p} (24 bit resolution), ±10 V _{p-p} optionally
Input impedance	20 MΩ
Mains frequency filtering	50 or 60 Hz selectable notch filter

Measuring methods

2D/3D Multi-Electrode Resistivity and IP Tomography
VES – Vertical Electrical Sounding (resistivity and IP)
RP – Resistivity and IP Profiling
SP – Self Potential
cross-hole tomography

Supported arrays

Wenner Alpha / Beta / Gamma, Wenner-Schlumberger, Dipole-Dipole, Pole-Dipole, Reverse Pole-Dipole, Pole-Pole, MGM, Equatorial Dipole-Dipole, Cross-Hole, Borehole-Surface, user defined configurations

Measurement - features

checking of grounding
automatic calibration
automatic pulse cycling and checking of measured values
easy interruption and continuation of measurement
capability of profile prolongation by means of multi-electrode cable rolling
better than 1% (typically)

Total accuracy

IP - Induced Polarization (Chargeability)

Pulse

SP compensation

Stacking

up to 10 adjustable IP-windows, each max. 30 s, step 20 / 16.66 ms

0.3 s – 30 s, step 0.1 s

constant and linearly varying SP cancellation

manual or automatic (with self-adaptive setting)

adjustable optimum measured voltage and maximum acceptable measurement error

Stored values

position of the measured point, output current, input voltage, SP, apparent resistivity, standard deviation, chargeability with standard deviation for up to 10 IP windows

Number of electrodes

max. 200 in one array

Control unit

easy-control system
alphanumeric keyboard, large LCD display
measuring system can be upgraded via internet
safety switch

Memory

16 Mbit, up to 100 files, 70000 readings

PC Interface

RS232 and USB

PC software

provides data download and export for processing programs (RES2DINV / RES3DINV, Surfer, IPI2WIN and others) as well as upload of measuring procedures

Power supply

12 V car battery or 12 V attachable battery pack, 12 V electronic power supply, AC/DC adapter for office

Connectors

for PC, battery and a universal one for all measuring accessories (Multi-Electrode Cable, VES-Adapter, Switch box), current and potential sockets

Dimensions

15 x 21 x 40 cm

Weight

5.9 kg

Ambient conditions

-10°C to +50°C, weatherproof

Standard Accessories:

- Transport case
- T-piece (for connection of multi-electrode cable sections and cables for current and potential electrodes)
- Cable for external 12 V battery (protective)
- AC/DC adapter (for all countries)
- RS232 and USB cables
- PC software ARES (MS Windows based)
- User manual

Optional accessories:

- Multi-electrode cable sections - active and passive
- Switch box (attachable 48-line adapter) for passive multi-electrode cables
- 12 V attachable battery pack with fast 3-stage battery charger
- 12 V electronic power supply
- VES-adapter (for 5 pairs of potential electrodes)
- Cable reels
- Stainless steel electrodes, non-polarizable electrodes
- Processing software for 2D/3D inversion, mapping and VES interpretation


ARES Accessories



Active Multi-Electrode Cable
MCS5



Passive Multi-Electrode Cable
MCC5

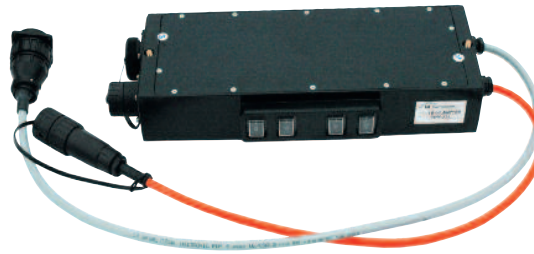

Switch Box (48 lines) for Passive Multi-Electrode Cables




VES Adapter

Recommended measuring sets for resistivity & IP tomography

These configured sets are offered at discounted prices.


Economy set with 48-line switch box (for 48 electrodes) - RES1-ECONOMY

ARES + 48-line switch box + 1 pair of connectors for user cables

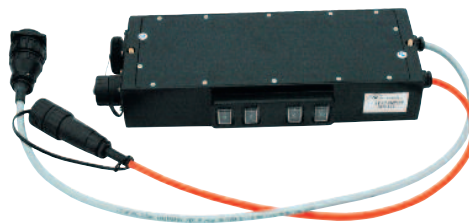

Schematic configuration (with user cables)


Possible expansion

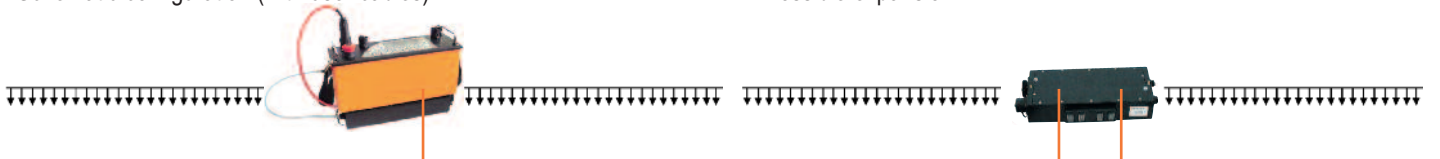

Single channel system for use with own multielectrode cables (electrically compatible with ARES transmitter) allows performing basic 2D, 3D, borehole and static water level measurements.

Passive cable set with 48 electrodes - RES2-PASSIVE


ARES + 48-line switch box + 4 pcs of MCC5 passive cables (each with 12 outlets at 5 m spacing on the reel)

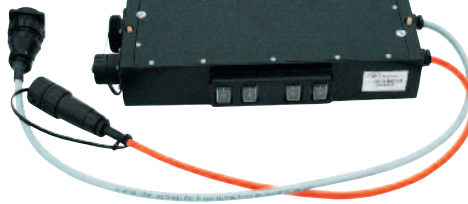

4 pcs

Schematic configuration

Possible expansion

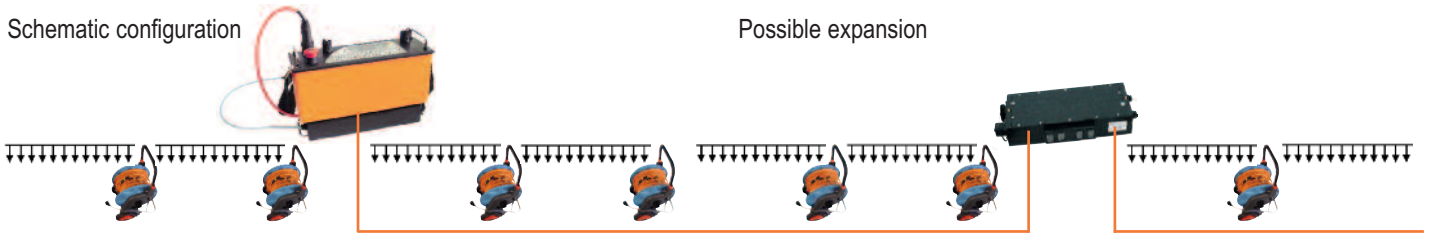

Single channel system for 2D, 3D survey (with limited roll along ability).

Active cable set with 48 electrodes - RES3-ACTIVE

ARES + 6 pcs of MCS5 active cables (each with 8 outlets at 5 m spacing, 2 plastic transport boxes, each with 3 cables)




6 pcs



2 pcs

Schematic configuration

Possible expansion



Single channel lightweight system for 2D, 3D survey with optimized current and potential lines and easy roll along possibility.

VES set - RES7-VES

ARES + VES cables (2 x 500 m current, 2 x 100 m potential on the reels)




2 pcs



2 pcs

Simplest set for VES (vertical electrical sounding).

General Accessories

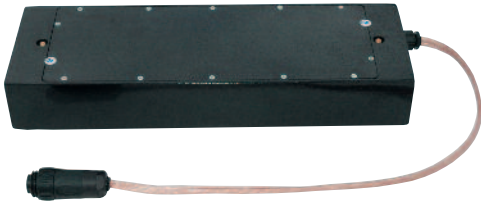

Battery Pack



Current Cable Reel



Potential Cable Reel




12 V Electronic Power Supply



Non-Polarizable Electrode







ARES Set in Transport Case

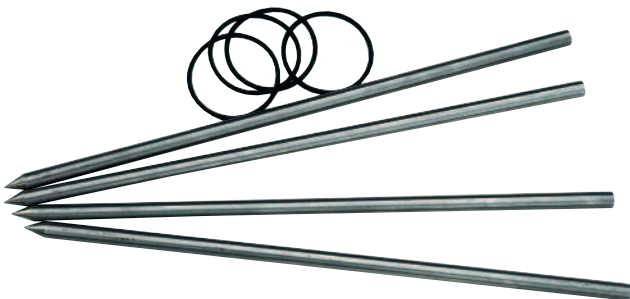

Stainless Steel Electrodes

Supported Ways of Measurement

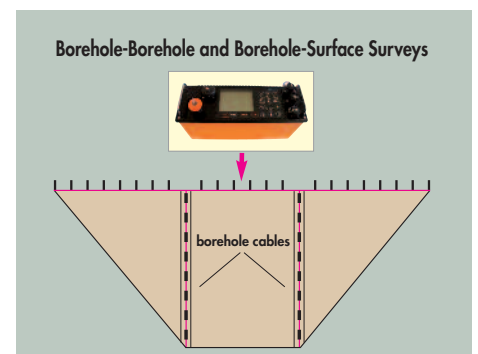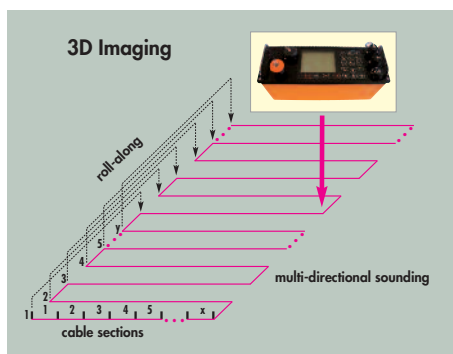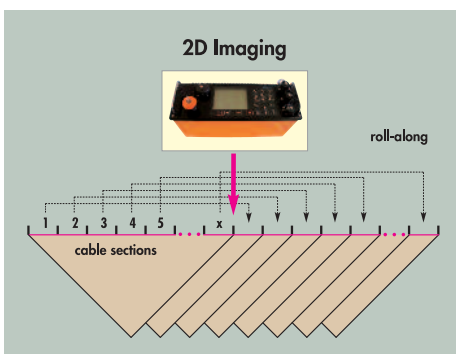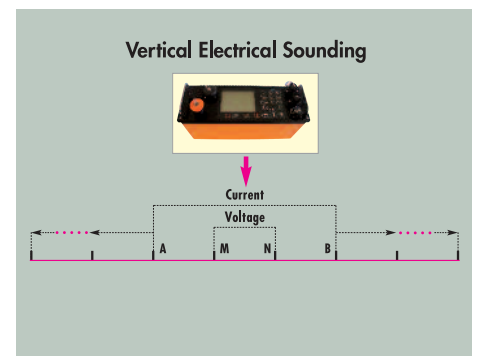


Monitoring of rock surface for judgement of slope deformation and landslide risk

Measurement before the new building construction. Wenner-Schlumberger array used.

(B) Bedrock surface

(S) Silty loam+Eluvium

(G) Biotite granodiorite

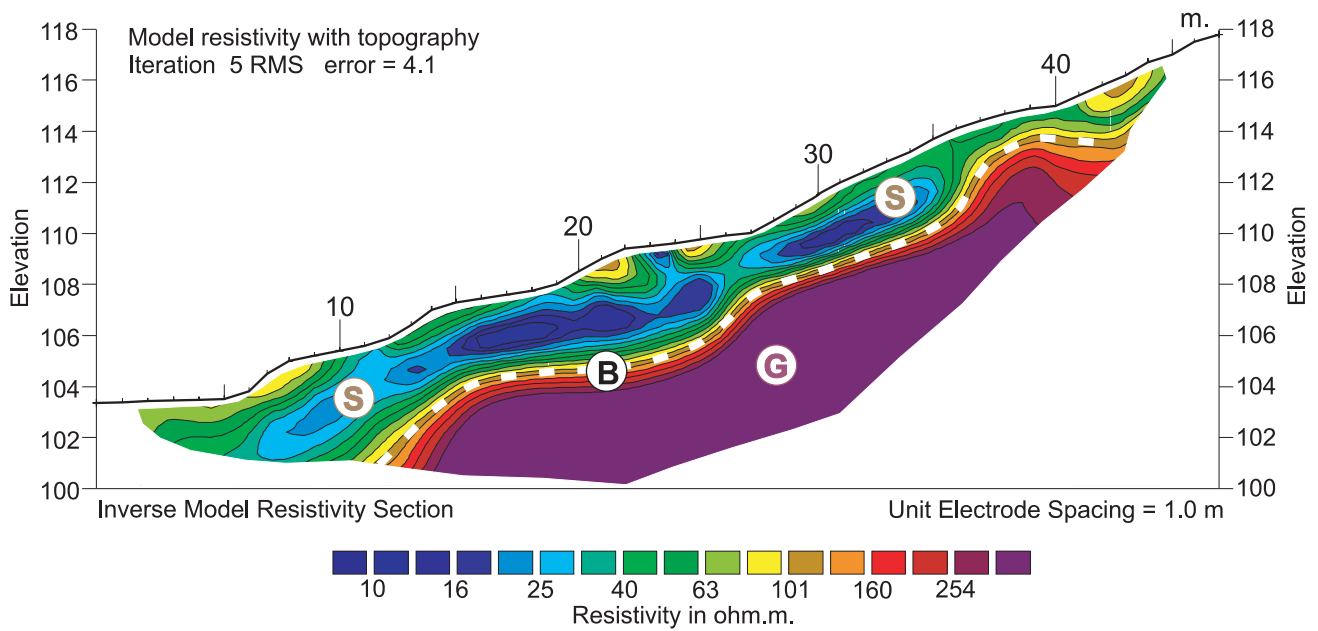

Ječná 29a, 621 00 Brno, Czech Republic
Tel.: +420 549 522 919, 916
Fax: +420 549 522 915
E-mail: info@gfinstruments.cz
www.gfinstruments.cz

REPRESENTED BY: